


IR Control 10 XTRA™

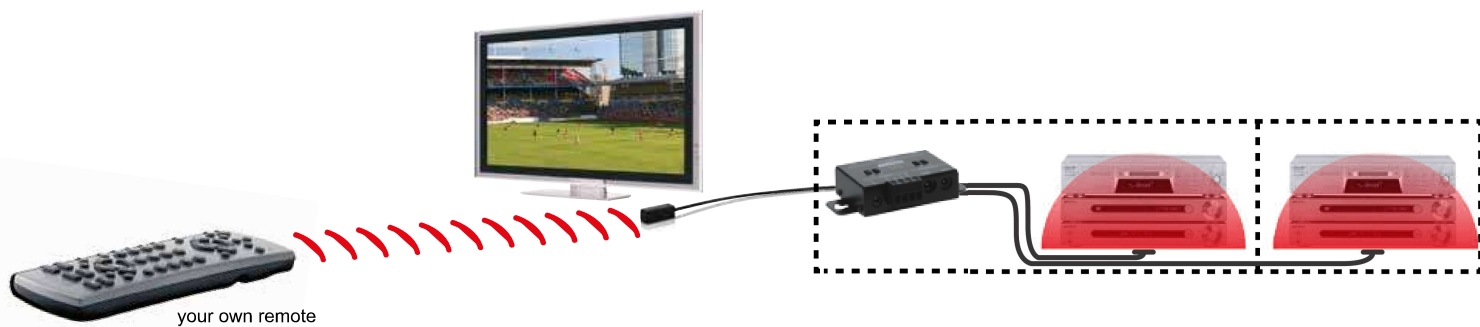

Technical data

Surface Mount IR Receiver


Frequency range:	30-60 KHz
IR reception range:	± 10 meters
IR reception angle:	90° (+45°/-45° from centre)
Cable length:	3 meters, extendable up to 300 meters
IR reception indication:	YES, purple indication LED
Status indication:	YES, green indication LED
Receiver dimensions:	40 x 13 x 11mm

IR module

Power supply POWER:	100-240VAC 50/60Hz, 12VDC 200mA (supplied)
Power supply STATUS:	5-24VDC / 5-12VAC plug, - 5.5mm outside / + 2.1mm inside (not supplied)
IR input:	1x 3.5mm jack connector, for standard IR receiver 1x screw connector, for up to 6 in parallel connected IR receivers. Extendable up to 300 meters using CAT5 (or equivalent)
IR output:	4x 3.5mm jack plug (mono), switchable for IR extension cables with emitter or blaster LEDs
Dimensions:	95 x 46 x 20 mm


IR extension cable with 1 blaster LED

Connection:	3.5mm jack plug (mono)
IR LEDs:	1x IR blaster LED
Cable length:	3 meters



IR extension cable with 2 emitter LEDs

Connection:	3.5mm jack plug (mono)
IR LEDs:	2x IR emitter LEDs
Cable length:	3 meters




Products specs may change without prior notice.

Set includes



Connections IR Module

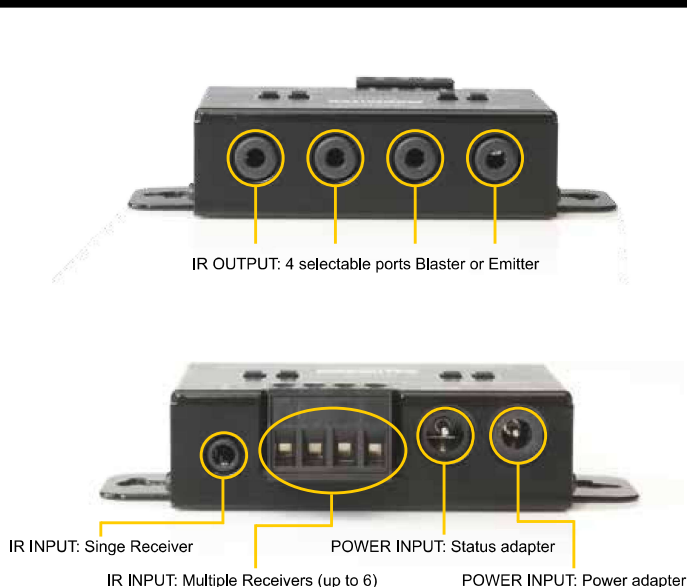

Order information

IR Control 10 XTRA™	EU Version	Art.nr. 08140	EAN 8718164531408
	UK Version	Art.nr. 08141	EAN 8718164531415
Gift box	Size (LxWxH)	260x185x65mm	

Also available

Extra IR Receiver

Every system needs at least one IR receiver (up to 6). With an extra IR receiver you can also operate your A/V devices from another room.

IRC3060S – Surface Mount Art.nr. 08142 / EAN 8718164531422

IRC3060P – Panel Mount Art.nr. 08143 / EAN 8718164531439

Extra IR extension cable with one blaster LED

To operate more A/V devices in an extra cabinet. An IR blaster radiates much more infrared light (even up to 2 meters) so it can operate multiple devices. Placement of the IR blaster is a lot less critical as opposed to IR LEDs.

Art. nr. : 08144 / EAN 8718164531446

Extra IR extension cable with two emitter LEDs

To operate 2 extra A/V devices. IR LED must be placed directly on the IR window of your A/V device.

Art. nr. : 08145 / EAN 8718164531453