

A

B

C

D

E

F

1

2

3

4



5

6


7

8

受 控



原理图

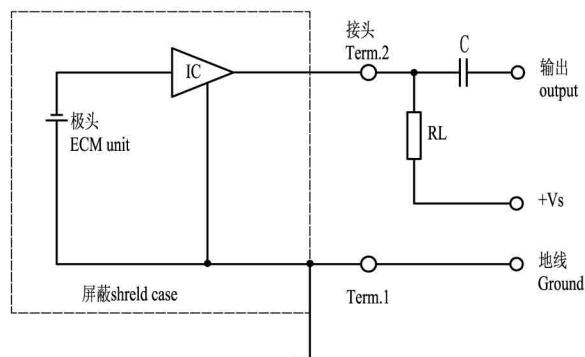

编号 NO.	项目 Items	规格 Specifications
1	额定电压 Rated Voltage	4.5V
2	工作电压 Operating Voltage	1.5V~10V
3	灵敏度 Sensitivity	-58± 2dB at 1KHz(0dB=1V/μ bar)
4	消耗电流 Current Consumption	0.5mA Max
5	频率范围 Frequency	100~16,000Hz
6	信噪比 S/N Ratio	≥60dB
7	灵敏度减低 Sensitivity Reduction	within-3dB at 1.5V
8	方向性 Directivity	Omnidirectional
9	测试条件 Testing Condition	1000Hz, Vs=4.5V, RL=2.2K Ω
10	壳体材料/颜色 Shell Material/Color	AL/Silver
11	工作温度 Operating Temperature	-25~+55 °C
12	贮存温度 Store Temperature	-25~+55 °C
13	重量 Weight	0.8g
备注 Note:	本产品符合RoHS指令 Compliance with RoHS	

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1° FIRST ANGLE PROJECTION 	DRAWN		CUSTOMER			
	DESIGN	水成锋	CUSTOMER NO.			
	CHECKED		DWG NO.			
	APPROVED	梁树棠	KP3.841.401R			
	DATE	12.02.09	VER 1.0 SCALE			
CONTRACT NO.			UNIT	mm	SHEET	
AGENCY APPROVAL						

△			
△			
△			
△			
NO.	DATE	REVISION	REFERENCE DWG

1

2

3

4

5

6

7

8

A

B

C

D

E

F