




VS-6EII

4x4 Composite Video & Stereo Audio Matrix Switcher (100MHz)



The **VS-6EII** is a high-performance matrix switcher for composite video and unbalanced stereo audio signals. They can switch any or all of the four inputs to any or all of the four outputs simultaneously.

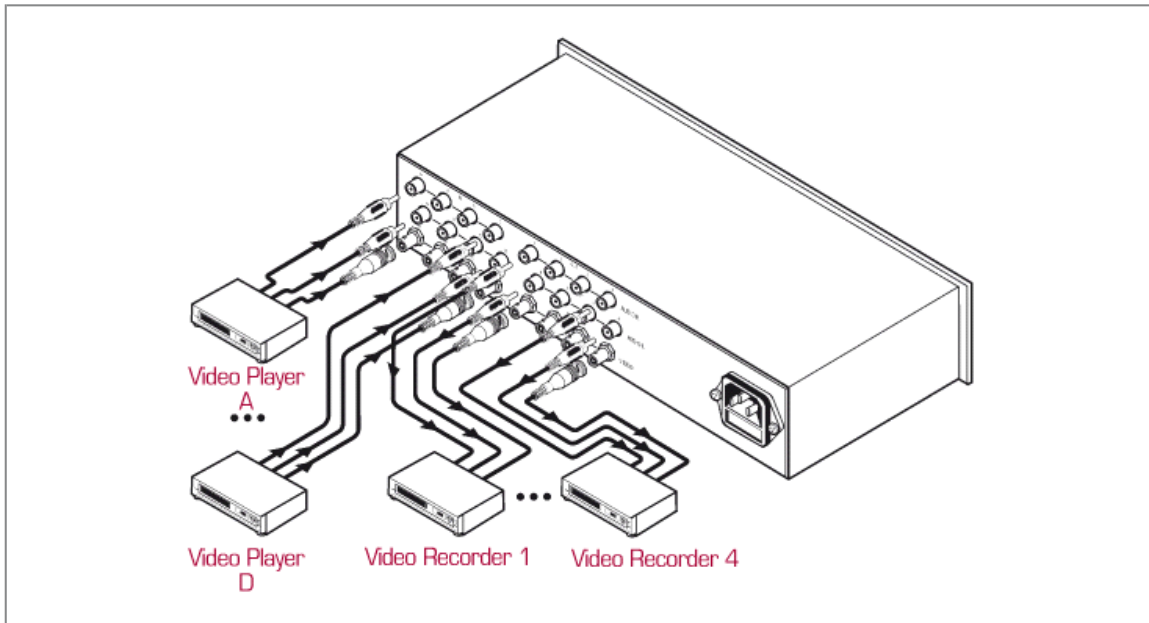



VS-6EII

FEATURES

- **Bandwidth** - 100MHz fully loaded (-3dB).
- **Control** - 4 rotary knobs.
- **Desktop Size** - Compact size. Can be rack mounted in a 2U rack space with the optional RK-10 adapter.

TECHNICAL SPECIFICATIONS

INPUT:	4 video, 1Vpp/75Ω composite on BNC connectors; 4 audio stereo 1Vpp/100kΩ on RCA connectors.
OUTPUT:	4 video, 1 Vpp/75Ω on BNC connectors; 4 audio stereo 1Vpp/100Ω on RCA connectors.
MAX. VIDEO OUTPUT:	2.4Vpp/75Ω.
BANDWIDTH (-3dB):	Video: 100MHz fully loaded.
AUDIO BANDWIDTH (-3dB):	24kHz.
DIFF. GAIN:	1.3%.
DIFF. PHASE:	0.9Deg.
VIDEO S/N RATIO:	74dB.
AUDIO S/N RATIO:	80dB.
AUDIO THD:	0.02%.
VIDEO CROSSTALK:	-65dB (SYNC), -48dB (C).
POWER SOURCE:	230V AC, 50/60Hz, (115V AC, USA) 10.6VA.
DIMENSIONS:	24.5cm x 16cm x 5cm (9.6" x 6.3" x 1.9") W, D, H.
WEIGHT:	1.7kg (3.8lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-10 19" rack adapter.