



Desoldering rework station

Model: ZD-915



Features

- The temperture is easily adjusted by simple up/down buttons.
- 140W temperature controlled soldering station with adjustable range from160°C to 480°C.
- The desoldering station is designed for lead free desoldering specially
- The side of the station features a typical holder with sponge.
- An illuminated power on/off switch is also located on the front.



Specifications

Code	Voltage	Note
89-8511	110-130V	ESD
89-8512	220-240V	
89-8513	110-130V	
89-8514	220-240V	

Including the spare parts below:



Spare desoldering gun

Model	Voltage	Power	Use for	Note
ZD-552A	24V	80W	ZD-915	6 pins, no sleep function
ZD-552B			ZD-985	7 pins, with sleep function




Model	Package	Q'ty/ctn	Carton Size	N.W	G.W
ZD-915	Gift box	2sets	46x29x23cm	6kgs	7kgs
ZD-985	Gift box		46x25x24cm	8kgs	9kgs

Specifications

Code	Voltage	Note
89-1511	110-130V	ESD
89-1512	220-240V	
89-1513	110-130V	
89-1514	220-240V	

Below spare parts included:

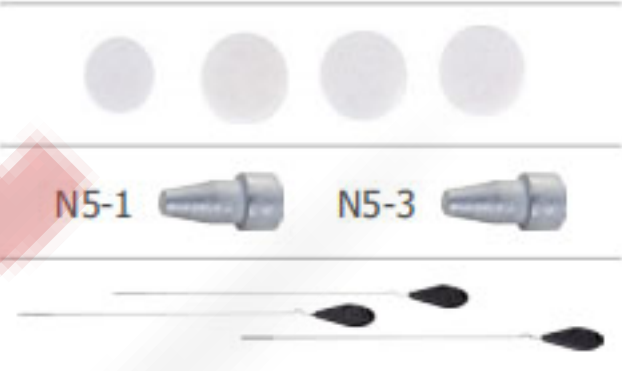

Spare heater

Code	Voltage	Power	Use for	Note
78-551B	24V	80W	ZD-552A/B	With temperature probe




Spare tips

Code	Model
79-1516	TIP N5-1
79-1526	TIP N5-2
79-1536	TIP N5-3

Spare Filter for:
ZD-915 ZD-917
ZD-985 ZD-987
Φ16.8 Code:79-5518
Φ20.8 Code:79-5519



TIPS: (N5)

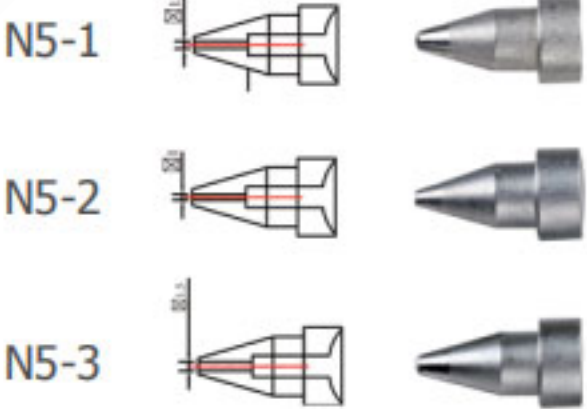

Desoldering Gun
Clearing Tool for:
ZD-552
Code:79-5511
79-5512
79-5513



Φ0.7 Φ0.9 Φ1.2

Sponge

Code	Size
79-7301	56x36mm



Station		Desoldering Gun	
Voltage supply	100-130V / 220-240V	power consumption	24V AC 80W heat up rating 130W
Power consumption	140W	Temperature	160°C-480°C
Vacuum pressure	600mm HG	Heating element	Ceramic heater