


New

XL7100U/XL7000U/WL7200U/ WL7050U/UL7400U




Connection Terminals

- 1 LAN (RJ-45)
- 2 Video / S-Video
- 3 PC/Component video in-1
- 4 Monitor out
- 5 PC/Component video in-2
- 6 HDMI
- 7 DVI-D in (HDCP)
- 8 Power in (3-pin with earth terminal)
- 9 Audio in [RCA (L/R)]
- 10 Audio in-1
- 11 Audio out
- 12 Audio in-2
- 13 Serial RS-232C (I/O)
- 14 Remote in/out
- 15 Audio DVI-D

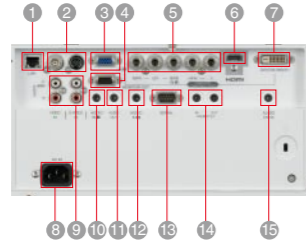

Dimensions (unit: mm)

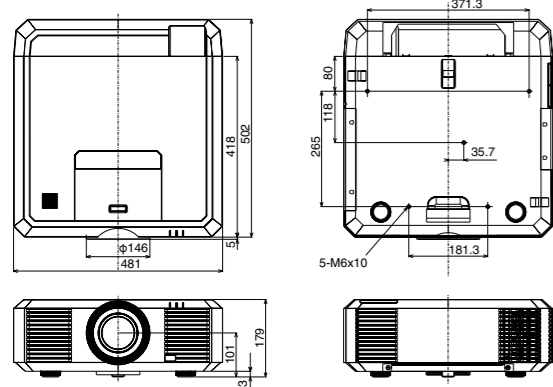

* The lens focal point is the default set at the time of shipment from the factory.

Options



Eco Changes for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.


Specifications

Model	XL7100U	XL7000U	WL7200U	WL7050U	UL7400U
Display technology	0.8" 3-LCD		0.76" 3-LCD		0.76" 3-LCD
Resolution	1024 x 768 (Total 786,432 pixels)		1280 x 800 (Total 1,024,000 pixels)		1920 x 1200 (Total 2,304,000 pixels)
Brightness*1 (Iris off)	6000 lm	5200 lm	5500 lm	4700 lm	5000 lm
Contrast ratio*1	2000 : 1 (Iris on)				
Projection lens	f=24.0-43.2mm, F=1.8-2.6				
Zoom / focus	Powered focus / zoom (zoom ratio 1.8 : 1)				
Picture size	40"-300" (100"=3.0m)		40"-300" (100"=3.1m)		40"-300" (100"=3.1m)
Source lamp	Standard mode: XL7100U/WL7200U/UL7400U: 350W (Shut off time 3000 hrs) XL7000U/WL7050U: 321W (Shut off time 3000 hrs) Low mode: XL7100U/WL7200U/UL7400U: 264W (Shut off time 4000 hrs) XL7000U/WL7050U: 264W (Shut off time 4000 hrs)				
Computer compatibility	Resolution: 640 x 400 - 1920 x 1200 True: 1024 x 768, Sync-on-Green available	Resolution: 640 x 400 - 1920 x 1200 True: 1280 x 800, Sync-on-Green available	Resolution: 640 x 400 - 1920 x 1200 True: 1920 x 1200, Sync-on-Green available		
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p 50/60Hz), 1080i (1125i 50/60Hz), 1080p (1125p 50/60Hz) SCART (RGB + 1V sync, only mini D-sub 15-pin Terminal)				
Input terminals	PC: 5 BNC x 1, mini D-sub 15-pin x 1, DVI-D (with HDCP) x 1, PC Audio: Stereo mini jack (ø3.5mm) x 3 Video: BNC x 1, S-Video (4-pin) x 1, HDMI (Ver 1.3, with Deep Color) x 1 (Only PCM audio is supported.), Audio: RCA (L/R) x 2				
Output terminals	RGB: mini D-sub 15-pin x 1 / Audio: Stereo mini jack (ø3.5mm) x 1 (Variable out)				
Communication terminals	LAN (RJ-45): x 1 (projector control), SERIAL (in): D-sub 9-pin (male) x 1 (direct command is available.), Wired remote (in): x 1 (ø3.5mm stereo mini jack), Wired remote (out): x 1 (ø3.5mm stereo mini jack),				
Speaker Output	10W Mono				
Dimensions (W x H x D)	481 x 179 x 418mm / 18.9 x 7.0 x 16.5 inch (excluding detachable terminal cover and protrusion)				
Weight	10.5kg / 23.2lbs (excluding detachable terminal cover)				
Power supply	AC 100 - 240V, 50/60Hz				

*1) Compliant with ISO21118-2005.
 •Varies depending on condition. •Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours. Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user manual. •HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. •All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Screen Size and Projection Distance

Refer to the following table to determine the screen size and projection distance.

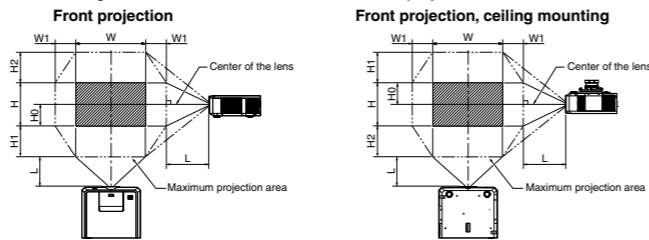

■XL7100U/XL7000U

Diagonal Size	Screen (XGA 4:3)			Distance from Screen		Default Height Projected Image (H ₀)	Movable V Position from Default Position				Movable H Position from Default Position												
	Width	Height	Shortest (Wicks)	Longest (Tels)	Down		Up	Down	Up	Left	Right	Left	Right										
40	102	76	81	24	61	46	1.2	85	2.1	-12	-30	14	-0	-14	37	-0	-37	10	-0	-10	24	-0	-24
60	152	114	122	36	91	70	1.8	128	3.2	-18	-46	22	-0	-22	55	-0	-55	14	-0	-14	37	-0	-37
80	203	151	163	48	122	94	2.4	171	4.3	-24	-61	29	-0	-29	73	-0	-73	19	-0	-19	49	-0	-49
100	254	188	203	60	152	118	3.0	214	5.4	-30	-76	36	-0	-36	91	-0	-91	24	-0	-24	61	-0	-61
150	381	283	305	90	229	177	4.5	322	8.2	-45	-114	54	-0	-54	137	-0	-137	36	-0	-36	91	-0	-91
200	508	377	406	120	305	237	6.0	430	10.9	-60	-152	72	-0	-72	183	-0	-183	48	-0	-48	122	-0	-122
250	635	471	508	150	381	297	7.5	538	13.7	-75	-191	90	-0	-90	229	-0	-229	60	-0	-60	152	-0	-152
300	762	565	610	180	457	357	9.1	646	16.4	-90	-229	108	-0	-108	274	-0	-274	72	-0	-72	183	-0	-183

■WL7200U/WL7050U

Diagonal Size	Image (WXGA 16:10)			Distance from Screen		Default Height Projected Image (H ₀)	Movable V Position from Default Position				Movable H Position from Default Position												
	Width	Height	Shortest (Wicks)	Longest (Tels)	Down		Up	Down	Up	Left	Right	Left	Right										
40	102	76	81	24	61	46	1.2	85	2.1	-11	-27	15	-0	-15	38	-0	-38	10	-0	-10	26	-0	-26
60	152	114	122	36	91	70	1.8	133	3.4	-16	-40	22	-0	-22	57	-0	-57	15	-0	-15	39	-0	-39
80	203	151	163	48	122	94	2.5	180	4.6	-21	-54	30	-0	-30	75	-0	-75	20	-0	-20	52	-0	-52
100	254	188	203	60	152	118	3.1	225	5.7	-26	-67	37	-0	-37	94	-0	-94	25	-0	-25	65	-0	-65
150	381	283	305	90	229	177	4.7	334	8.5	-40	-101	56	-0	-56	141	-0	-141	38	-0	-38	97	-0	-97
200	508	377	406	120	305	237	6.3	446	11.3	-53	-135	74	-0	-74	188	-0	-188	51	-0	-51	129	-0	-129
250	635	471	508	150	381	297	7.9	559	14.2	-66	-168	93	-0	-93	236	-0	-236	64	-0	-64	162	-0	-162
300	762	565	610	180	457	357	9.5	679	17.2	-79	-202	111	-0	-111	283	-0	-283	76	-0	-76	194	-0	-194

■UL7400U

Diagonal Size	Image (WUXGA 16:10)			Distance from Screen		Default Height Projected Image (H ₀)	Movable V Position from Default Position				Movable H Position from Default Position												
	Width	Height	Shortest (Wicks)	Longest (Tels)	Down		Up	Down	Up	Left	Right	Left	Right										
40	102	76	81	24	61	46	1.2	85	2.2	-11	-27	13	-0	-13	32	-0	-32	10	-0	-10	26	-0	-26
60	152	114	122	36	91	70	1.8	133	3.4	-16	-40	19	-0	-19	48	-0	-48	15	-0	-15	39	-0	-39
80	203	151	163	48	122	94	2.5	177	4.5	-21	-54	25	-0	-25	65	-0	-65	20	-0	-20	52	-0	-52
100	254	188	203	60	152	118	3.1	222	5.6	-26	-67	32	-0	-32	81	-0	-81	25	-0	-25	65	-0	-65
150	381	283	305	90	229	177	4.7	334	8.5	-40	-101	48	-0	-48	121	-0	-121	38	-0	-38	97	-0	-97
200	508	377	406	120	305	237	6.3	446	11.3	-53	-135	64	-0	-64	162	-0	-162	51	-0	-51	129	-0	-129
250	635	471	508	150	381	297	7.9	559	14.2	-66	-168	79	-0	-79	202	-0	-202	64	-0	-64	162	-0	-162
300	762	565	610	180	457	357	9.4	671	17.0	-79	-202	95	-0	-95	242	-0	-242	76	-0	-76	194	-0	-194

* The above figures are approximate and may be slightly different from the actual measurements.



Changes for the Better

MULTIMEDIA DATA/VIDEO PROJECTORS



Striking Images, Simple to Use...
 From Installation to Operation –
 Amazingly High Quality in Every Aspect

New

XL7100U/ XL7000U/ WL7200U/WL7050U/ UL7400U

To find out more about XL7100U/XL7000U/WL7200U/WL7050U/UL7400U and other projectors, visit us at

<http://www.MitsubishiElectric.com/projectors/>


MITSUBISHI ELECTRIC CORPORATION
 HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

Revised publication effective Mar. 2012
 Superseding publication of L-188-1-C8858-A Nov. 2011
 Specifications are subject to change without notice.

for a greener tomorrow

Advanced, Multifunctional Projector – Ideal for large meeting rooms and theater-like settings

Mitsubishi Electric 7000 series projectors offer high levels of brightness and contrast, improved installation ease and eco-conscious features in consideration of the environment. Capable of ensuring clear, sharp large-screen presentations in large meeting rooms and theater-like settings, these user-friendly projectors are ideal for visual communication with impact.

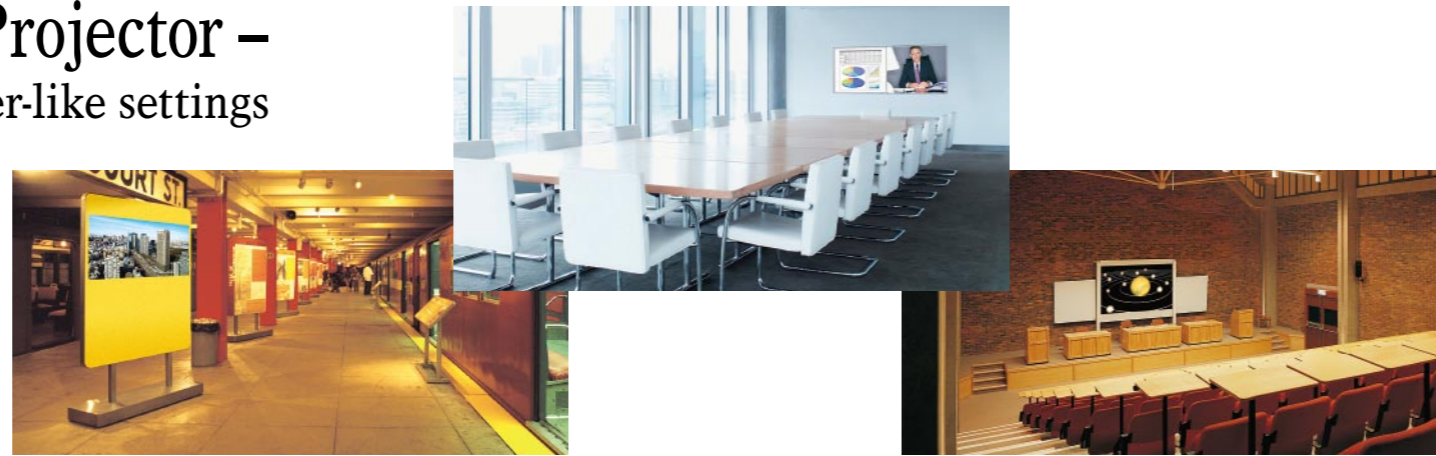

New XL7100U/XL7000U/WL7200U/
WL7050U/UL7400U

High Image Quality


Impressive 6000lm*1 Brightness and 2000:1*2 High Contrast

The XL7100U reproduces vivid beautiful images using 6000lm*1 brightness at a high contrast ratio of 2000:1*2. Even in large meeting rooms and theater-like settings, its liquid-crystal projection system ensures clear, sharp presentation images every time.

*1) XL7000U: 5200lm, WL7200U: 5500lm, WL7050U: 4700lm, UL7400U: 5000lm *2) At the iris on.

Dynamic Contrast Correction


The 7000 series analyzes the image signal, detects the screen brightness distribution of each scene and then automatically corrects the signal in real-time to enhance contrast. This suppresses the loss of shadow details in dark scenes and highlight details in bright scenes, producing clear, dynamic images.

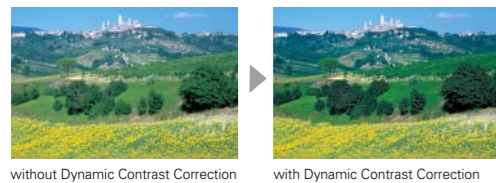

The trees in the middle of the screen have a sharply defined outline, producing a distinct sense of depth.

High-performance Lens

This lens is comprised of 17 lenses in 13 clusters, including a high-performance ED (ultra-low dispersion) lens that is more efficient than regular glass lenses. Image resolution all the way to peripheral boarders is greatly improved.




Natural Color Matrix

In addition to conventional red (R), green (G) and blue (B) color gradations, the intermediate colors of yellow (Y), magenta (M) and cyan (C) can each be controlled independently. Accentuating specified colors according to need realizes the reproduction of vivid color tones one step closer to natural.

Super Resolution

This innovative advanced image processing algorithm is a product of Mitsubishi Electric. The technology analyzes blurred components of the original images, estimates the high-resolution data not provided in the original signal and corrects the image quality. The result is the clear projection of images such as people's faces in fine detail.

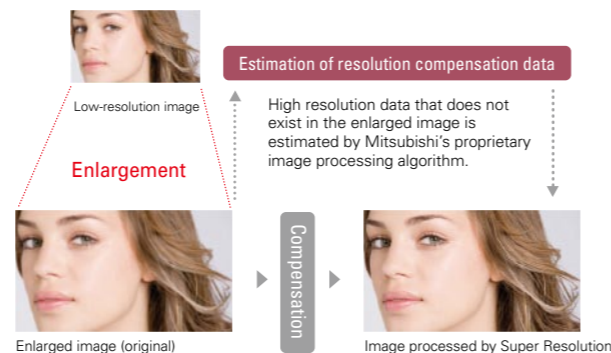


Installation Flexibility

Wide-area Lens Shift

The WL7200U/WL7050U features a wide-area lens adjustment range of $\pm 70\%$ vertically and $\pm 30\%$ horizontally, for greater installation freedom. The zoom, focus and lens shift functions are all powered operation.

*UL7400U/XL7100U/XL7000U: $\pm 60\%$ vertically, $+30\%$ horizontally



Variety of Optional Lenses

Choose from four different lenses to best match the projection distance. Compared to previous lenses, each lens covers a wider range of projection ratios.

Bayonet Mount

The bayonet mounting system incorporated offers one-touch lens removal, making it easy to change lenses after installation. Simply unscrew and removed the anti-drop cover, press down on the release button and turn the lens to remove it. Similarly, to install a lens, just insert it and turn.



Attractive Design

In consideration of ceiling-mounted installation and appearance in terms of room décor, a modern center-lens, white-based design is adopted and a terminal cover that hides cables has been added. The remote-control signal receiving section is now located on the backside of the projector, improving remote-control operation performance when mounted on the ceiling.




Geometric Corrections

Keystone Correction

Trapezoidal distortion caused when the projector is not positioned directly in front of the screen is corrected in both vertical and horizontal directions.

Cornerstone Correction

Pixel conversion is used to correct trapezoidal and diagonal distortion that causes oblique images, ensuring the proper aspect ratio.



Curved-surface Projection Correction


Projectors in the series are equipped with a distortion correction function that can be used when projecting images onto curved surfaces. Coordinates at the image's four corners are adjusted, enabling the projection angle to be adjusted at the time of angled or stacked projection. It is extremely handy for unique applications like projecting images onto special surfaces such as pillars at event sites.



360° Projection Capability

Images can be projected over a full 360° range along the vertical axis* including reproduction on the ceiling or floor. The application possibilities are limitless.

*Excluding use in high-altitude mode.



ID-compatible Remote Control (set IDs for up to 63 projectors)

- Extended-distance Remote Control (wireless: 30m, wired: 100m)
- Lamp side replacement


High Reliability

4000hr Long-life Lamp*

By optimizing temperature control design, the light-source lamp can be used for up to 4,000 hours. These improvements result in a remarkable reduction in operating cost.

*When used in low mode.

Lamp Life Comparison

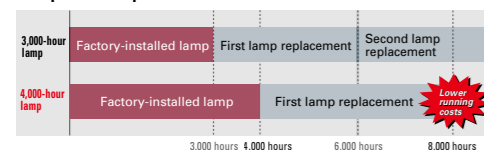

Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours. Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user manual.

Inorganic Liquid-crystal Panel

An inorganic liquid-crystal panel is incorporated, increasing the service life compared to that of conventional organic liquid-crystal panels.

Roll-up Filter*

To help prevent dust from collecting on the liquid-crystal panel, a cartridge-type filter is added as standard equipment. It can be set so that the filter rolls automatically every 500, 750 or 1,000 hours, or winding can be done manually.

*UL7400U, WL7200U, XL7100U only.



Eco friendly

4000hr Long-life Lamp*

A light-source lamp capable of operating up to 4,000 hours reduces both operating cost and labor required for replacing lamps.

*When used in low mode.

Stand-by Wattage under 0.3W*

Stand-by (low) mode power consumption is less than 0.3W, offering increased energy savings and further contributing to environmental preservation.

*When in stand-by (low) mode. At this time, use of the LAN function is not possible.

Quiet 30dB Operation

Fan noise during projector operation can be distracting during a presentation or videoconference. 7000 series projectors operate at a significantly low noise level of only 30dB (i.e., in "low lamp" mode). As a result, presentations and conferences can be held without distracting projector noise in the background.

Additional Features

Network Connectivity

Projectors are equipped with a RJ-45 LAN terminal for remote operation. Additionally, when used with Crestron RoomView™, integrated control of up to 250 projectors including power on/off control, message display and confirmation of lamp service hours is possible. Mitsubishi Electric 7000 series are equipped with AMX Device Discovery for simplified device management and compatible with PJLink™.

The trademark of PJLink is trademark applied for registration or registered trademark in Japan, the United States, and other countries and areas.



2-Screen mode

(PinP: XL7100U/XL7000U
Split: WL7200U/WL7050U/UL7400U)

- Test pattern
- Direct power off

Closed caption support

High-altitude mode (1,500 to 2,700m)

- Virtual DICOM mode
- OSD menu multilanguage compatibility (20 languages*)

*Existing languages: Chinese, English, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish
Languages added: Dutch, Indonesian, Malaysian, Norwegian, Thai, Turkish, Vietnamese, Arabic