


# G SERIES

12.0x12.0 Flat Stem With Stable Operation Feeling Tact Switch



## HOW TO ORDER

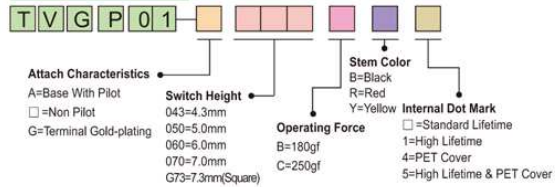

## Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Standard knobs are available.

## Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc.

## Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B:200,000 Cycles C:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

## Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• TVGP01</p>	
2	<p>• TVGP01-□ G73</p>	
3	<p>• TVGP01-A</p>	

TACT SWITCH