

LRG-Series

ILLUMINATED DOUBLE POLE ROCKER & PADDLE SWITCHES

The double pole lighted version of the R-Series incorporates the same sleek lines as the original Corvette, in a double pole envelope. This illuminated version features silver-plated butt-action contacts with ratings to 20A/125, 15A 250VAC and withstand peak inrush currents up to 100 amps. Clear or translucent style rocker actuators and a choice of solder lug, .250 Tab and wire lead terminations enable this switch to adapt to high current applications.



Product Highlights:

- Ratings to 20A
- Neon or Incandescent Illumination
- Silver Plated Butt-contact mechanism
- Clear or translucent style rockers

Typical Applications:

- Power Supply
- Appliance
- Exercise Equipment
- Music Equipment



Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 Fax: 860.793.9231

www.carlingtech.com

Dielectric Strength

UL/CSA:
1000V - live to dead metal parts &
opposite polarity

Electrical Life


50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

-40°F to 185°F (-40°C to 85°C)

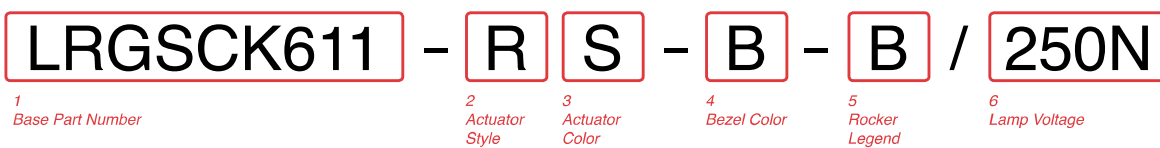

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION
15A 250 VAC, 20A 125 VAC, 3/4 HP 125-250 VAC

	Solder Lugs	.250 Tabs	Wire Leads
Standard Base			
OFF-NONE-ON	LRGSC610	LRGSC611	LRGSC615
European Base (22 x 30 mm cutout)			
OFF-NONE-ON (Single Pole)	LRGSE610	LRGSE611	LRGSE615
15A 6-24 V³			
Standard Base			
OFF-NONE-ON	LRGSC510	LRGSC511	LRGSC515
European Base (22 x 30 mm cutout)			
OFF-NONE-ON (Single Pole)	LRGSE510	LRGSE511	LRGSE515

4 BEZEL COLOR ¹

B Black	W White
----------------	----------------

5 ROCKER LEGEND

NO LEGEND	0
OFF-ON vertical	A
OFF-ON horizontal	B
I-O horizontal	D
I-O vertical	E
Dual OFF-ON, I-O vertical	H
Dual OFF-ON, I-O horizontal	J

hot stamp

2 ACTUATOR STYLE

R Rocker (translucent)	C Rocker (clear)
-------------------------------	-------------------------


6 LAMP VOLTAGE ²

006V 6V incandescent	024V 24V incandescent
012V 12V incandescent	125N 125V neon
018V 18V incandescent	250N 250V neon

3 ACTUATOR COLOR

A Amber	L³ Lime Green
B^{3,5} Blue	P Yellow
C⁴ White/Clear	R Red (clear)
G⁵ Green	S Red
	W Pale Red

Notes:
 1 Additional ratings, colors and clear style actuators are available. Consult factory.
 2 Incandescent lamps must specify 15A 24V rating only.
 3 Available with incandescent lamps only.
 4 Clear color provided where specified with clear style rocker.
 5 Available with clear style rocker only.

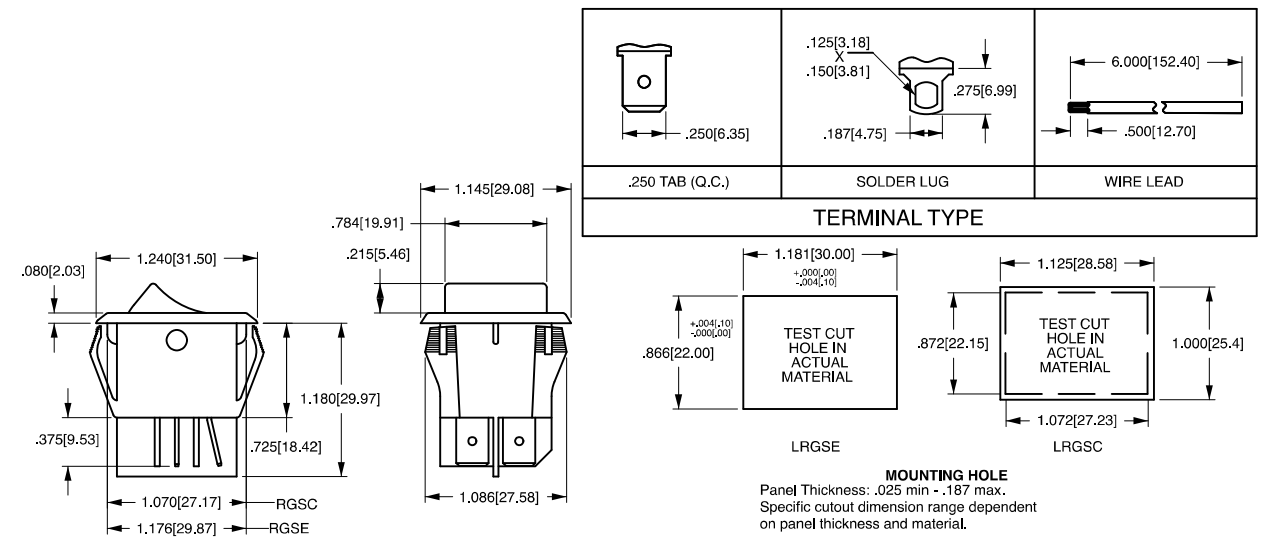

*Manufacturer reserves the right to change product specification without prior notice.