



# PSDC/T series power supply unit

## Power supply 12V DC for up to 8 analog cameras



CODE: **PSDC08128T** v.1.0/IV  
TYPE: **PSDC 12V/8A/8x1A/TOPIC** power supply for up to 8 analog cameras

EN

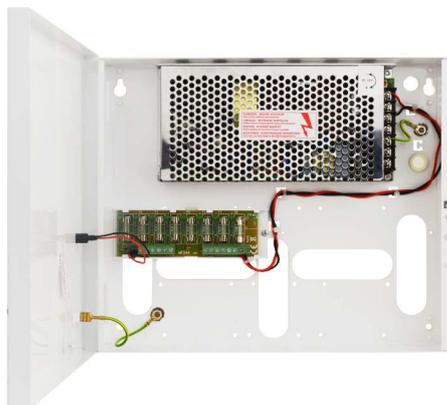

### Features:

- the 8x 1A/12VDC power output for powering analog cameras
- output voltage adjustment 12V÷ 15VDC
- 8 outputs, protected with 1A fuses
- wide range of supply voltage 176÷264VAC
- high efficiency 83%
- LED indication
- protections:
  - SCP short-circuit protection
  - OVP over voltage protection
  - surge protection
  - OLP overload protection
- warranty – 2 year from the production date

### DESCRIPTION

The stabilized PSU **PSDC08128T** stabilized power supply is designed to supply analog cameras or other devices requiring stabilized voltage of **12V DC**. The output voltage adjustment range is adjusted via a potentiometer within the range of **12V ÷ 15V DC**. The PSU features 8 outputs protected independently by glass fuses. A failure (a short circuit) in the output circuit makes a fuse blow or an activation of the polymer fuse and disconnection of the circuit from the DC power supply (+U). The PSU is housed in a metallic enclosure with an indication panel .

# PSDC/T series power supply unit

## Power supply 12V DC for up to 8 analog cameras



SPECIFICATIONS	
Power supply	176 ÷ 264 V AC
Current consumption	0,8A@230VAC max.
PSU power	100W max.
Efficiency	83%
Output voltage	12 V DC
Output current	<b>8x 1A (Σ I = 8A) max. @12V</b>
Output voltage adjustment range	12V÷ 15V DC
Ripple voltage	100mV p-p max.
Short-circuit protection SCP	LB8 STRIP 8x F 1A fuse PSU MODULE 105% ÷ 150% of PSU power, electronic current limiting
Overload protection OLP	105% ÷ 150% of PSU power, electronic current limiting
Surge protection	varistors
Overvoltage protection OVP	>16V (automatic recovery)
LED indication	LEDs
Operating conditions	2nd environmental class, temperature: -10 °C÷50 °C, relative humidity 20%...90%, without condensation
Enclosure	Steel plate DC01 0,7mm thick, colour: RAL9003
Dimensions	290 x 241 x 51+8 (WxHxD) [mm] (+/- 2)
Net/gross weight	1,82/2,02 kg
Closing	Cheese-head screw: at the front
Declarations, warranty	CE, RoHS, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led. Convictional cooling.