




AS-PT1(WCPT1)

Features

Used to protect over / under voltage
 With front / back connecting socket
 LED display

Type

Three -phase protective relay AS- PT1

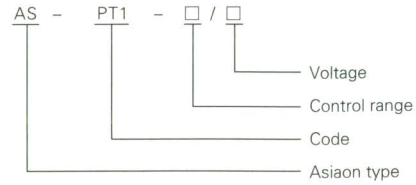


Specification

Voltage	380VAC
Operating type	over/under voltage protective relay
Under-voltage adjusting rang	-5 ~ -20% +5 ~ 20%
Operating temperature	-10°C ~ +50°C
Power consumption	≤3VA
Dielectric strength	BCC1500VAC; BOC1000VAC
Output type	Relay output: 1Z
Contact capacity	5A220VAC
Standard	GB 140485;JB/T 10047

Outline dimension、Mounting holes、 Wiring diagram

AS-PT1 Outline dimension

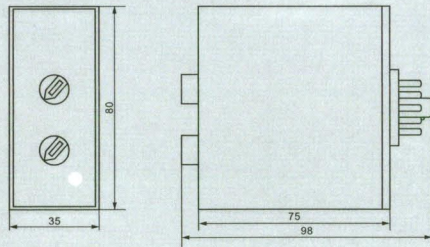

AS-PT1Wiring diagram

