



AS-UP1/M

**Features**


Used to control time sequence  
 With front / back connecting socket  
 LED display

**Specification**

Voltage	24 ~ 250VAC/DC
Delay type	On delay; Interval delay, Equal repeating delay, Interval pulse start, Pulse start delay
Delay range	0.15S ~ 10S; 1.5S ~ 100S; 1S ~ 1M; 10S ~ 10M; 100S ~ 100M; 1M ~ 1H; 10M ~ 10H
Delay accuracy	± 5%
Reset time	300mS
Operating temperature	-10°C ~ +50°C
Power consumption	≤3VA
Dielectric strength	BCC1500VAC; BOC1000VAC
Output type	Relay output: 1Z
Contact capacity	10A220VAC
Standard	GB 140485; JB/T 10047


**Type**

Unequal repeating and two-shot multi-range time relay AS-UP1/M

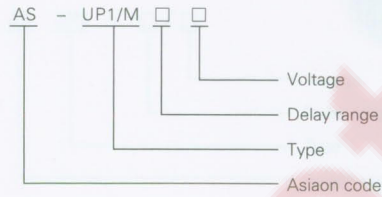


**Outline dimension. Wiring diagram. Mounting holes**

AS-UP1/M Outline dimension

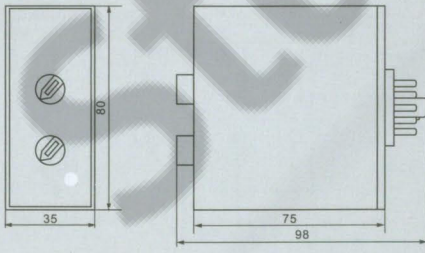

AS-UP1/M Wiring diagram



**Contact us**

Phone: +30 26510 24011  
 Fax: +30 26510 34511

Mon - Wed - Sat: 08:30-14:30  
 Tues - Thur - Fri: 08:30-14:00, 17:30-21:00  
 Email: sales@stathisnet.gr