



1	2	3	4	5	6	7	8	
					REV	ECN NO.	NATURE OF MODIFICATION	CN/DATE
					1		First Issued	2012-09-12
					2			
					3			

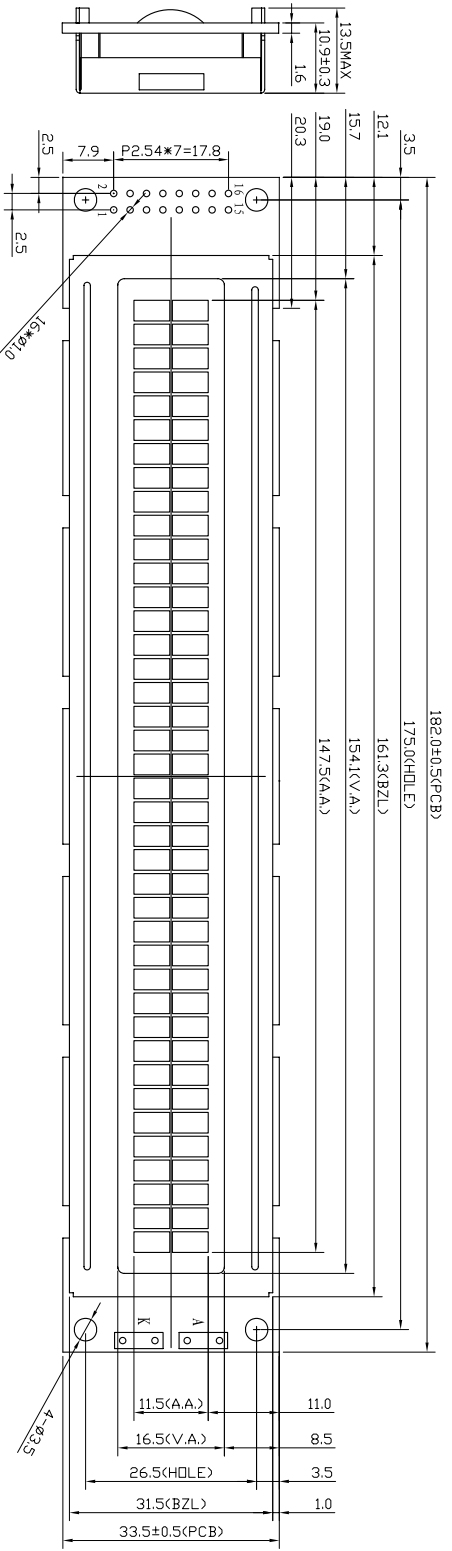

ITEM		PARAMETERS		ITEM		PARAMETERS	
OPERATING VOLTAGE		5.0V		OPERATING TEMP		-20°C TO 70°C	
OPERATING CURRENT		--		STORAGE TEMP		-30°C TO 80°C	
LCD DRIVE VOLTAGE		4.5V		POLARIZER TYPE		FRONT: TRANSMISSIVE BACK: TRANSMISSIVE	
DISPLAY MODE		STN/(Y-G)/POSITIVE/TRANSMISSIVE		BACKLIGHT		LED-BOTTOM Y-G, I <sub>F</sub> =360mA	
LCD DRIVE METHOD		1/16 DUTY, 1/5 BIAS		ROHS STANDARD		YES ■	
LCD DRIVE IC		ST7068U-0A OR EQUIV		OTHER		--	
VIEW DIRECTION		6:00					

UNIT	MM	TOLERANCE	X.X = ±0.2 X.XX = ±0.10 ANG = --
3RD ANGLE			
SCALE:	1:1		
DRAWN:	JiangFM		
CHECKED:			
APPROVED:			

TITLE:		LCM	
MODEL NO.:		ACM4002E-ML-YBW	
PART NO.:		--	

**DISPLAYTRONIC**  
XIAMEN ZETTLER ELECTRONICS CO., LTD.

16	LED-
15	LED+
14	DB7
13	DB6
12	DB5
11	DB4
10	DB3
9	DB2
8	DB1
7	DB0
6	E
5	R/W
4	RS
3	V0
2	VDD
1	VSS

REV	A
SH NO	1/1