
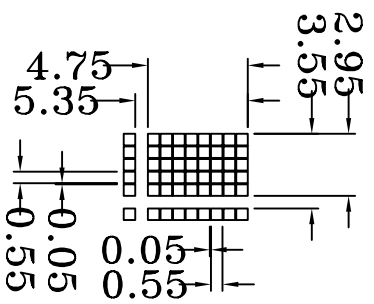


REV	ECN NO.	NATURE OF MODIFICATION	CN/DATE
△	—	First issued	2012-09-12
△			
△			

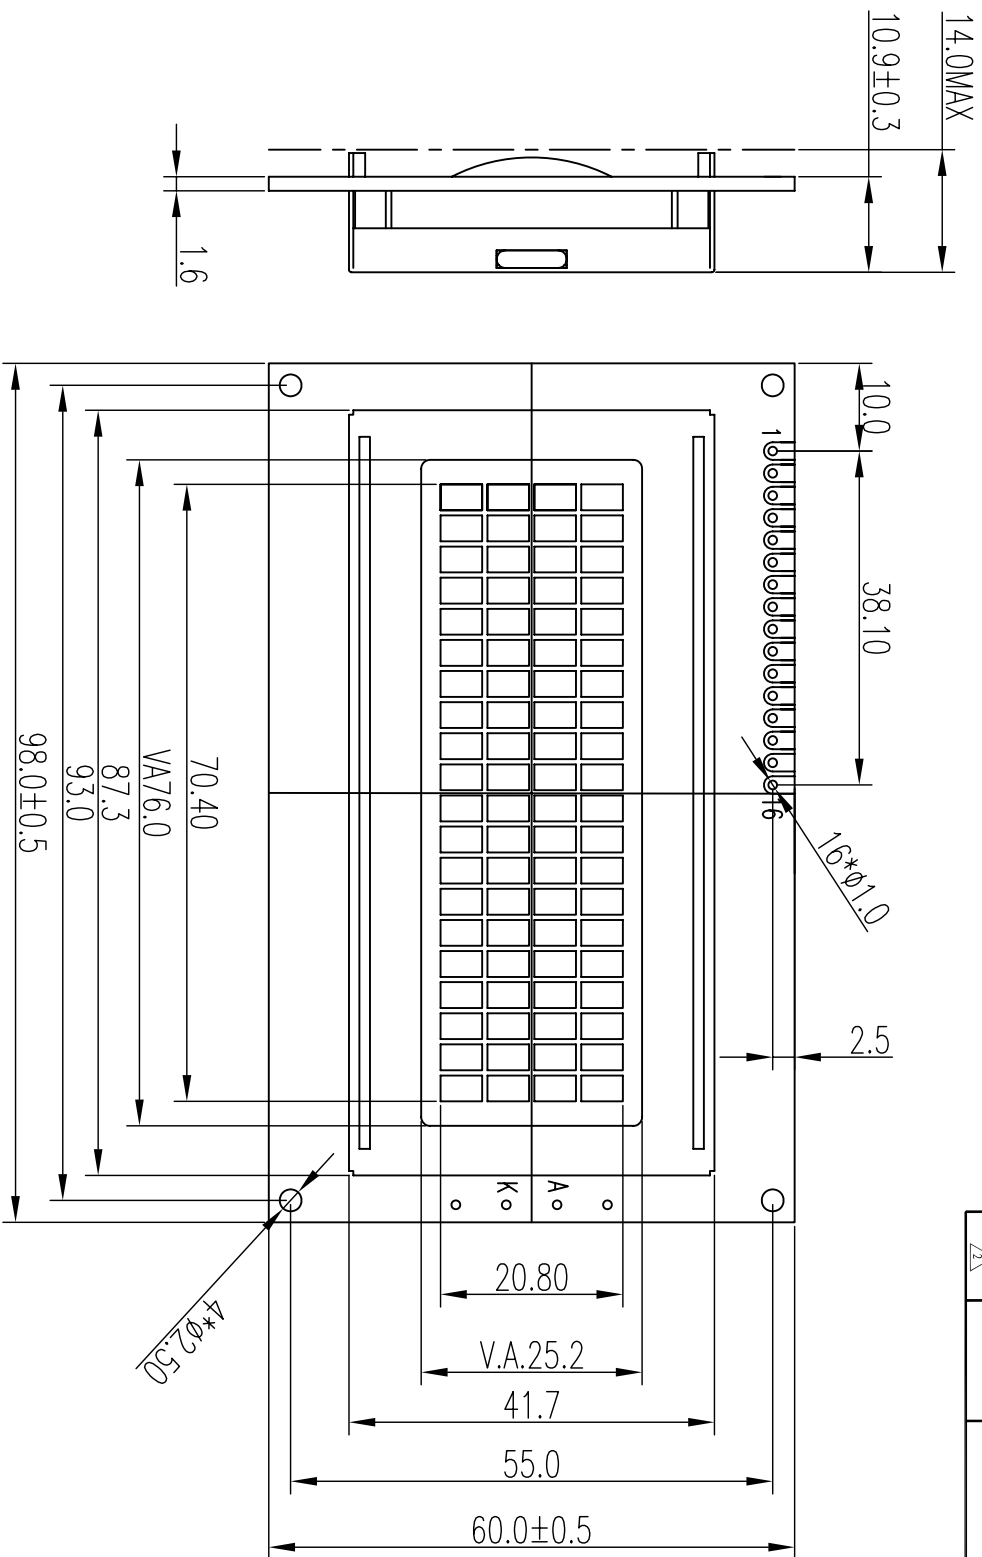

16	BL-
15	BL+
14	DB7
13	DB6
12	DB5
11	DB4
10	DB3
9	DB2
8	DB1
7	DB0
6	E
5	R/W
4	RS
3	V0
2	VDD
1	VSS
PIN	SYMBOL

DISPLAYTRONIC

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	5.0V	OPERATING TEMP	-20°C TO 70°C
OPERATING CURRENT	--	STORAGE TEMP	-30°C TO 80°C
LCD DRIVING VOLTAGE	4.2V	POLARIZER TYPE	FRONT: TRANSMISSIVE
DISPLAY MODE	STN/POSITIVE/TRANSMISSIVE	BACK: TRANSMISSIVE	
LCD DRIVE METHOD	1/16 DUTY 1/5 BIAS	BACKLIGHT	LED (Yellow-Green), 4.2V, 2.40mA
LCD DRIVE IC	ST7066U-0A OR EQUIV	ROHS STANDARD	YES ■
VIEW DIRECTION	12:00 O'CLOCK	OTHER	--

UNIT	MM	TOLERANCE
3RD ANGLE	3RD ANGLE	X, X.X = ±0.3
ANG = --	ANG = --	X, XX = ±0.2
SCALE:	1:1	
DRAWN:	JiangFM	
CHECKED:		
APPROVED:		

TITLE:	LCM
MODEL NO.:	ACM2004D-ML-VTW
PART NO.:	...
REV	A
SIT NO	1/1