



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Dec-17-2007

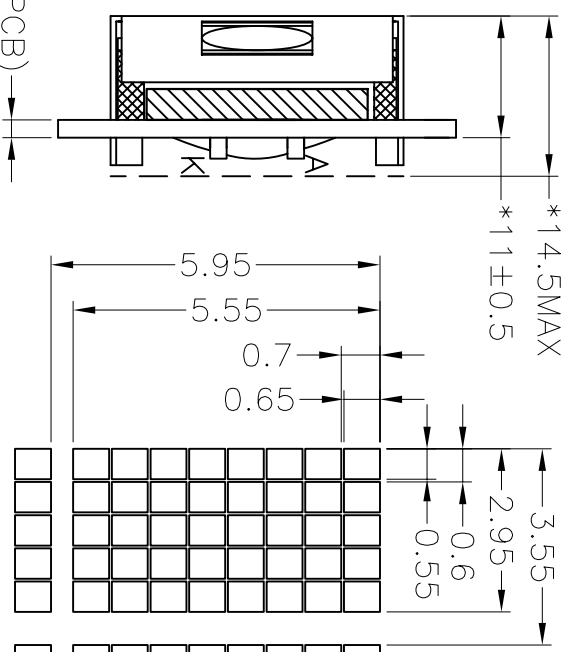

DOTS SIZE
SCALE:5/1

VIEWING DIRECTION

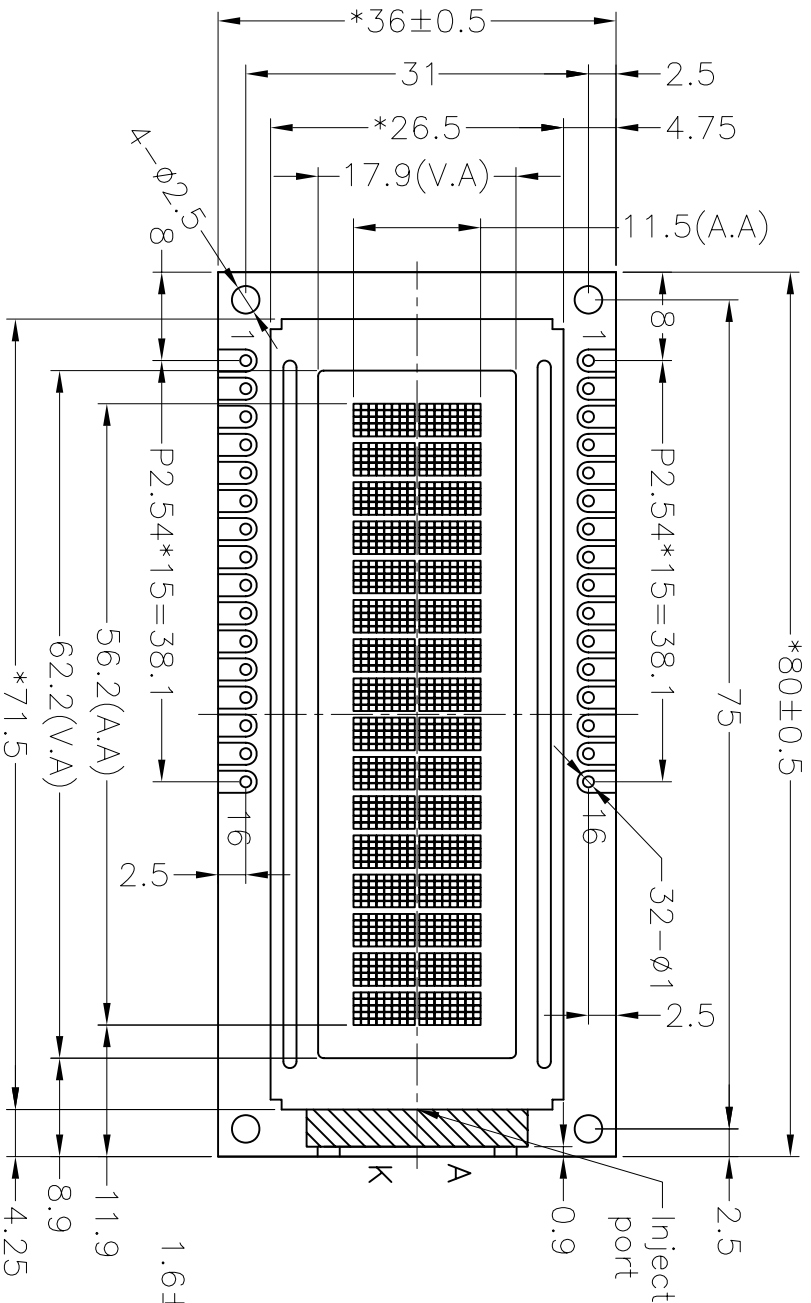

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.2V, VDD:5.0V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-001B-C(or compatible)
- 7). Backlight: Edge White(2PCS SMD 4.0V 30mA)
- 8). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	V0	RS	R/W	E	D0	D1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	D2	D3	D4	D5	D6	D7	LEDA	LEDK



深圳秋田微电子有限公司
SHENZHEN AYO-ELECTRONICS CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIT 适应图面
ABC016002A15-B1W-R			ABC016002A15-B1W-R	1	OR 1
GENERAL TOL: ±0.3			SHEET: 1	UNIT 单位: mm	
DATE			CHK:	DATE	
DW.N:			APP:	DATE	

DO NOT SCALE THIS DRAWING.