


Nylon Cable Glands



Overview

- ◆ Material: made from UL Nylon 66, 94V-2 and tighten ring from rubber.
- ◆ Feature:
 - 1.Special design of clamp ring, good clamping strength and protective for electric machinery.
 - 2.No need of disassembling the cable gland, cable can go through directly then tighten it, easy to operate and save time.
- ◆ Application: used for machinery control box, distribution plate, machine and electrical, etc.

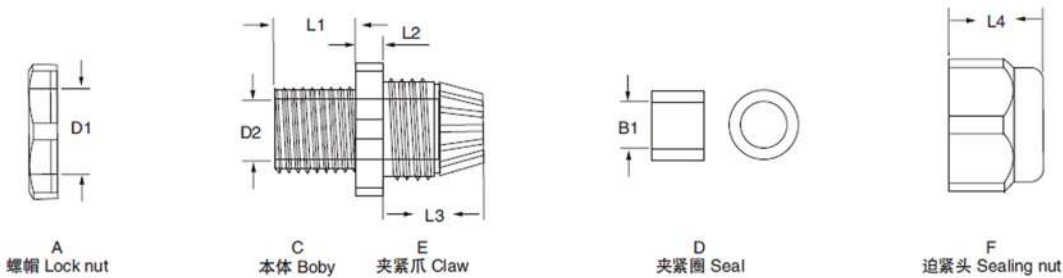

Technical Parameters

编号 Item NO.	D1(mm)	D2(mm)	L1(mm)	L2(mm)	L3(mm)	L4(mm)	B1(mm)	电缆直径范围 Cable range
PG-07	12.1	8.7	8.3	5	15.0	13.8	6.9	3.5-6
PG-09	16.2	11.1	8.7	4.6	16.1	15.7	8.9	4-8
PG-11	18.2	13.4	8.7	5.1	18.1	17.9	11.3	5-10
PG-13.5	20.1	15.5	8.9	5.0	19.2	18.3	12.8	6-12
PG-16	22.3	17.6	11.3	5.2	20.2	18.1	13.7	10-14
PG-19	24.1	19.1	11.1	5.1	21.1	20.5	15.8	12-15
PG-21	26.7	21.4	11.1	5.1	23.0	22.0	17.4	13-18
PG-24	30.1	24.8	12.8	5.8	23.9	23.7	23.1	15-22
PG-29	35.9	28.8	11.9	6.9	24.4	23.5	25.3	18-25
PG-36	46.4	39.1	16.0	7.8	30.7	27.3	31.9	22-32
PG-42	53.9	46.7	15.4	7.9	33.2	28.5	37.1	30-38
PG-48	60.2	52.6	18.0	7.9	35.5	30.3	45.1	34-44
PG-63	70.6	63.9	28.9	8.9	41.4	41.3	49.3	42-54