


铜电缆固定头 Brass Cable Glands

编 号 ITEM NO.	适用电缆 (mm) Cable range	螺纹外径 (mm) Thread O.D.	机板孔径 (mm) Mounting hole diameter	螺纹长度 GL (mm) Thread length GL	接合长度 H (mm) Joint length H	扳手径 (mm) Spanner size
M8 × 1	5.5-2	8	8-8.2	5	16	12
M10 × 1	6.5-3	10	10-10.2	7	19	14
M12 × 1.5	6.5-3	12	12-12.2	7	19	14
M14 × 1.5	8-4	14	14-14.2	7	19	17
M16 × 1.5	8-4	16	16-16.2	8	20	18
M18 × 1.5	10-5	18	18-18.2	8	21	20
M20 × 1.5	12-6	20	20-20.2	8	22	22
M22 × 1.5	14-10	22	22-22.2	8	23	24
M24 × 1.5	14-10	24	24-24.2	9	25	24/27
M25 × 1.5	14-10	25	25-25.2	9	25	24/27
M27 × 1.5	18-13	27	27-27.2	9	27	30
M28 × 1.5	18-13	28	28-28.2	9	27	30
M30 × 1.5	18-13	30	30-30.2	9	29	30/32
M32 × 1.5	22-15	32	32-32.2	10	29	35
M36 × 1.5	25-18	36	36-36.2	10	31	40
M40 × 1.5	25-18	40	40-40.2	11	31	40/45
M42 × 1.5	30-22	42	42-42.2	11	35	45
M48 × 1.5	33-25	48	48-48.2	11	37	50/52
M50 × 1.5	38-32	50	50-50.2	12	37	50/55
M54 × 1.5	38-32	54	54-54.2	12	38	57
M60 × 1.5	44-37	60	60-60.2	13	38	64
M63 × 1.5	44-37	63	63-63.2	13	38	64/68
PG7	6.5-3	12.5	12.5-12.7	7	19	14
PG9	8-4	15.2	15.2-15.4	8	20	17
PG11	10-5	18.6	18.6-18.8	8	21	20/21
PG13.5	12-6	20.4	20.4-20.6	8	22	22
PG16	14-10	22.5	22.5-22.7	9	23	24
PG19	14-10	25	25-25.2	9	25	24/27
PG21	18-13	28.3	28.3-28.5	9	27	30
PG25	22-15	32	32-32.2	10	29	35
PG29	25-18	37	37-37.2	11	31	40
PG36	33-25	47	47-47.2	12	37	50
PG42	38-32	54	54-54.2	13	38	57
PG48	44-37	59.3	59.3-59.5	14	38	64
PG63	52-42	72	72	15	42	77

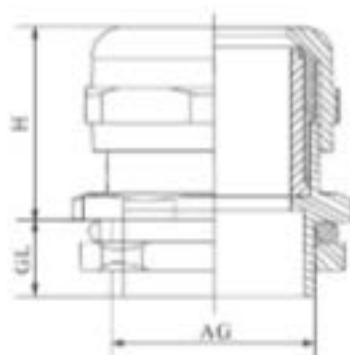

- ◆ 产品材质：接头主体部位采用黄铜镀锌制成，夹装件采用尼龙塑料(PA)制成，密封件和O型密封圈均采用丁腈橡胶(NBR)制成。
- ◆ 产品认证：欧洲CE认证、欧洲ROHS认证、欧洲REACH认证。
- ◆ 防护等级：在规定的卡口范围内，并使用O型密封圈旋紧接头，达到IP68-10巴压力。
- ◆ 适用温度：静态：-30℃到80℃，短时间达120℃；动态：-20℃到80℃，短时间达100℃。
- ◆ 螺纹长度：短螺纹适合用于薄型机板的开孔或附有内螺纹的设备上，长螺纹适合接合厚型主板。螺纹加长型可定制。
- ◆ 产品特性：特殊夹装爪与夹装圈凹凸相扣之设计，配合逆装头装配省时便利，夹装电缆范围大，抗拉力强，可防水、防尘、抗盐、耐酸碱、酒精、油脂及一般溶剂。
- ◆ 使用方法：金属电缆防水接头是电缆的配套产品，接头可将电缆锁紧，另一端可接入设备箱体上，也可以根据选用螺纹接入进出口为内螺纹的电动设备上。
- ◆ 更多选择：可根据客户实际需求，特别定制。需要订购时欢迎来电咨询。

- ◆ Material: Body: Nickel-plated brass, Seal: PA66, Sealing: NBR.
- ◆ Certification: CE, ROHS, REACH.
- ◆ Protection rating: IP68.
- ◆ Application temperature: Static condition: -30℃ to 80℃, short-time 120℃. Dynamic condition: -20℃ to 80℃, short-time 100℃.
- ◆ Thread length: Standard thread type is suitable for equipment with internal thread or with thin plate. Longer thread type is suitable for thick plate.
- ◆ Feature: special design of the clamp and seals, extremely easy installation, suit for wide range of cable, strong stretching resistance, waterproof, dust proof, resist to salt, acid, alcohol, grease and other solvent.
- ◆ Application: fix the cable gland on the plate, insert cable through the assembled gland and tighten gland locknut until cable is secured.
- ◆ Notes: Customization is available.