


0601 KSS NYLON CABLE GLAND

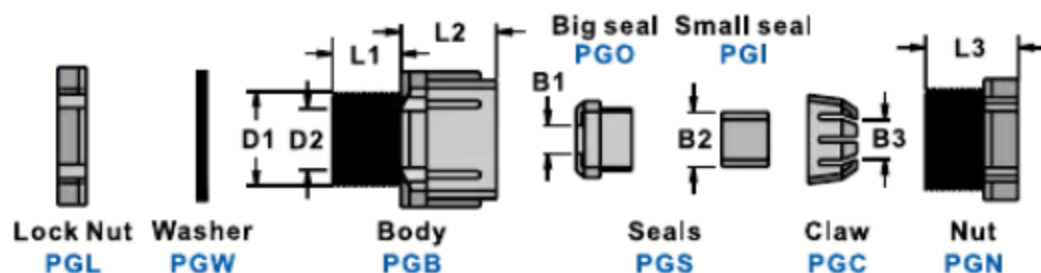

UNIT : mm

Item No.	Mounting Hole D1	D2	B1	B2	B3	L1	L2	L3	Cable Range	Packing
PG-16	16.0	11.0	4.8	6.5	10.0	12.0	17.0	16.0	5~10	50 pcs
PG-20	20.0	14.1	5.1	10.5	12.5	13.0	19.0	19.0	6~13	
PG-25	25.0	18.5	8.5	9.5	14.0	13.0	22.0	22.0	10~18	
PG-32	32.0	25.0	10.8	14.5	21.0	15.0	24.5	24.5	16~22	25 pcs
PG-40	40.0	32.4	19.5	21.5	24.0	20.5	26.5	27.3	20~27	10 pcs
PG-50	50.0	42.0	19.5	31.0	33.5	23.0	30.0	31.0	30~41	
PG-63	64.5	56.0	38.0	44.5	49.5	25.0	33.0	32.0	40~53	

- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Well designed for insulation, waterproof and impact resistant. Used extensively for protection and fixation of cables in control panel and apparatus.
- Application:
 1. Mount body to pre-drilled panel hole and fix it with locking nut.
 2. Insert cables through body and then seals consequently. Finally, press them together with press nut to hold cable in position.