

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20


© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	SEE ECR 11-010607	17MAY2011	JS	LB
	G1	ECR-14-007191	25JUN2014	SK	JS

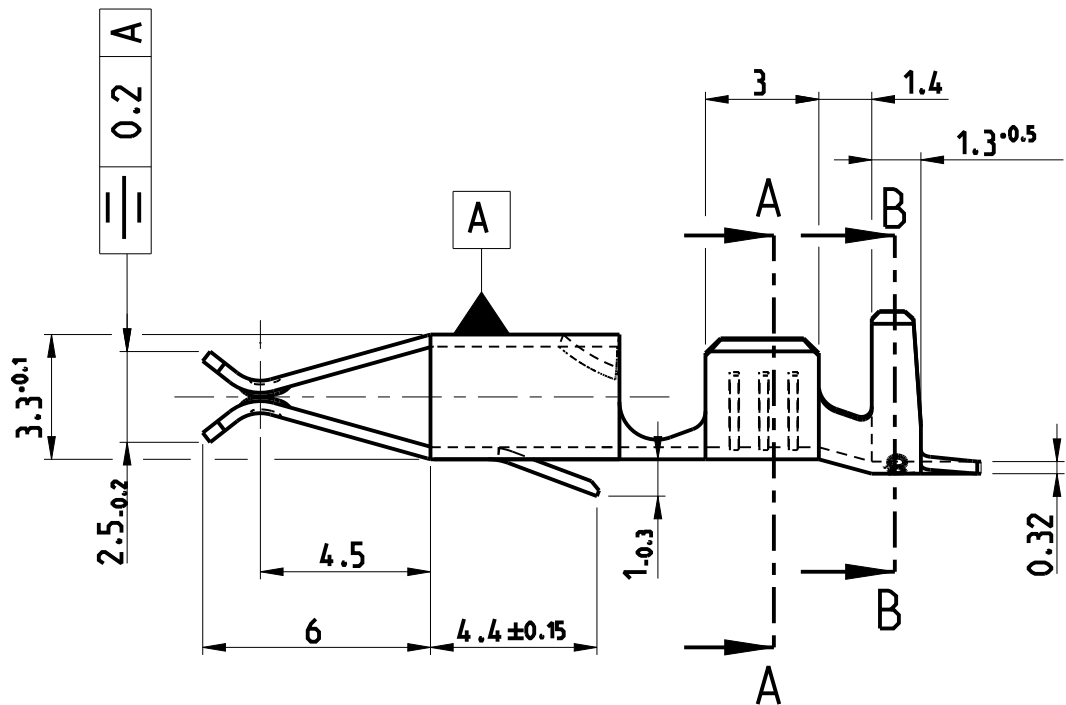


SECTION A-A




SECTION B-B

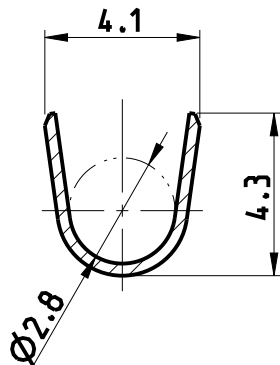

SECTION C-C

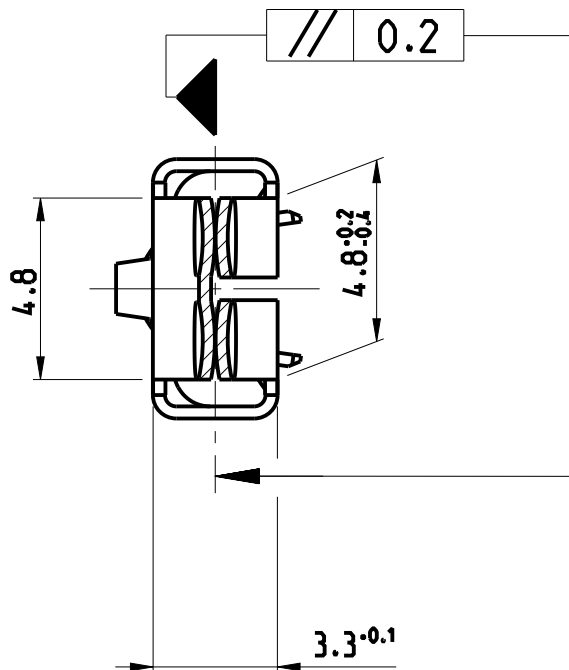

Kontakt geeignet für:
Draht Groessenbereich 0.5 - 1.5 mm
Isolationsbereich Ø2.0 - 3.0 mm

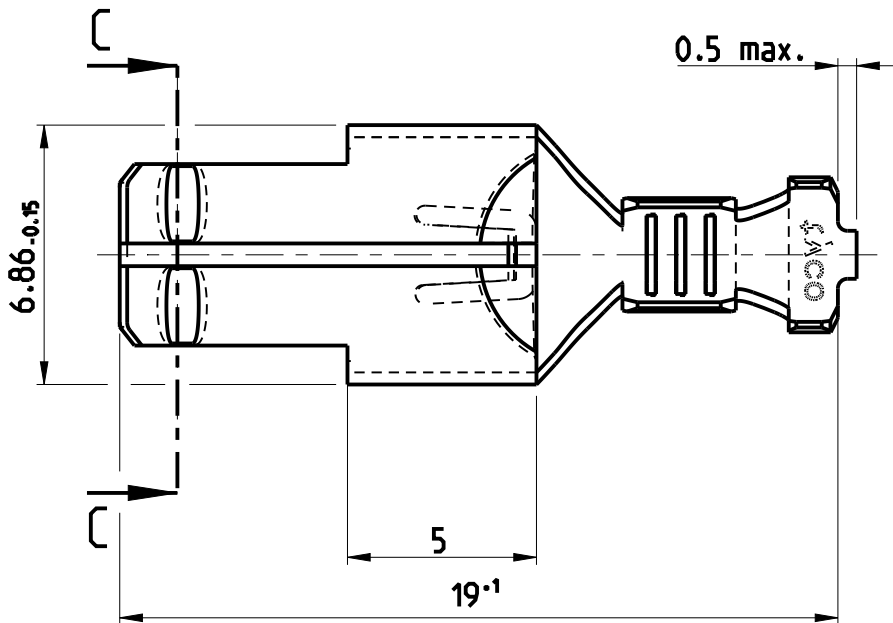

Notes

1 OBSOLETE

Leitungsquerschnitt in mm²

	Einzelanschlag	0.5	0.75	1.0	1.5
0.5	X	X			
0.75	X				
1.0	X				
1.5	X				

927936-4	1	STANDARD-TIMER Kontakt	vorverzinnt	CuNiSi	926965-4	1	F
927936-3	1	STANDARD-TIMER Kontakt	vorverzinnt	Kupfereisen	926965-3	1	F
927936-2	1	STANDARD-TIMER Kontakt	vorverzinnt	Bronze	926965-2		G
927936-1	1	STANDARD-TIMER Kontakt	vorverzinnt	Messing	926965-1		G
EINZELAUSFUEHRUNG		BENENNUNG EINZELTEIL	OBERFLÄCHE	WERKSTOFF	BANDWARE		REV.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GOERKE 01FEB1988	 TE Connectivity				
DIMENSIONS: mm		CHK BITSCH 27JUN2014					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Bleicher.M. 19JUN07	NAME STANDARD TIMER CONTACT				
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		PRODUCT SPEC	SIZE A3				
±0.2mm		APPLICATION SPEC	CAGE CODE -				
±1°		WEIGHT	DRAWING NO C-926965				
MATERIAL SEE TABLE		Customer Drawing	RESTRICTED TO -				
FINISH SEE TABLE		SCALE 5:1	SHEET 1 OF 1				
-			REV G1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[926965-1](#) [926965-1 \(Mouser Reel\)](#) [926965-1 \(Cut Strip\)](#)