
Specification


1.Application

This series of fuse links is mainly used in AC 50Hz, rated voltage up to 1140V, rated current up to 1250A and for protecting electric equipment from overload and short-circuit. It can reliably break the min. fusion current to any current within 120KA.



It is also available for the protection of semiconductor parts and equipments against short-circuit (type aR) and protection of motors (type aM).

This series of fuse links conforms to GB13539 and IEC 60269 standards.

2. Dimensions

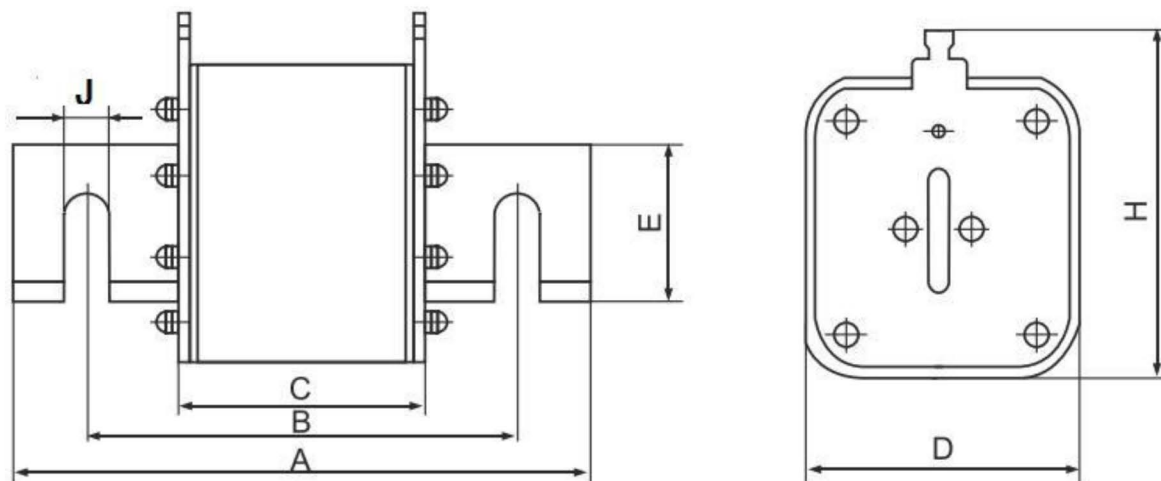

Model	Size(mm)						
	A	B	C	D	H	J	E
NH4	200	150	78	80	113	16.5	6

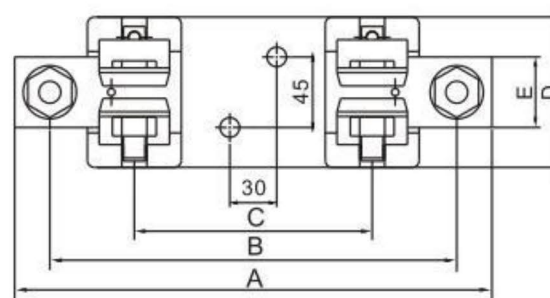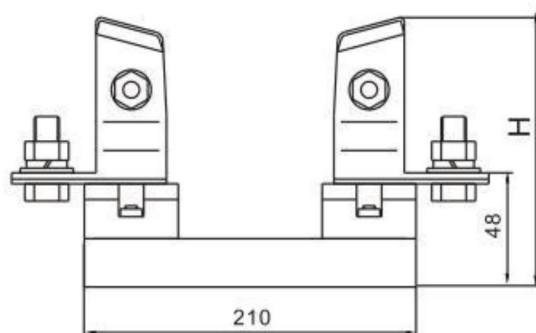

Model	Size(mm)					
	A	B	C	D	E	H
NT4	305	260	150	95	45	148

3. Characteristic Curve

