

KJD12 Electromagnetic Switch



KJD12



KJD12



KJD12-10ZF



KJD12-10

Description

On-off and electric motor control with built-in under voltage and overload protection. Applicable for electrical machine tools such as electrical carpentry tools, bench drills, grinder, lathe, saws.

Specifications


Standard	VDE0630 , DIN(EN61058)	TUV(EN60947)	TUV(EN61058)		UL,CUL(UL508,E195428)	
Rated Voltage	250V~	240V~	120V~	250V~	120V~	220-240V~
Rated Current	10(8)A	10A(AC-3, AC-15)	16(16)A 10(8)A	16(12)A 10(8)A	16A 3/4HP	16A 1.5HP
Coil Voltage	120V~		220-240V~			
Rated Frequency	50/60Hz					
Number of operating Cycles	5E4					
Ambient Temperature Limits	T85/55					
Degree of Protection	IP54					

Reference Dimension

KJD12

KJD12-10ZF

KJD12-10

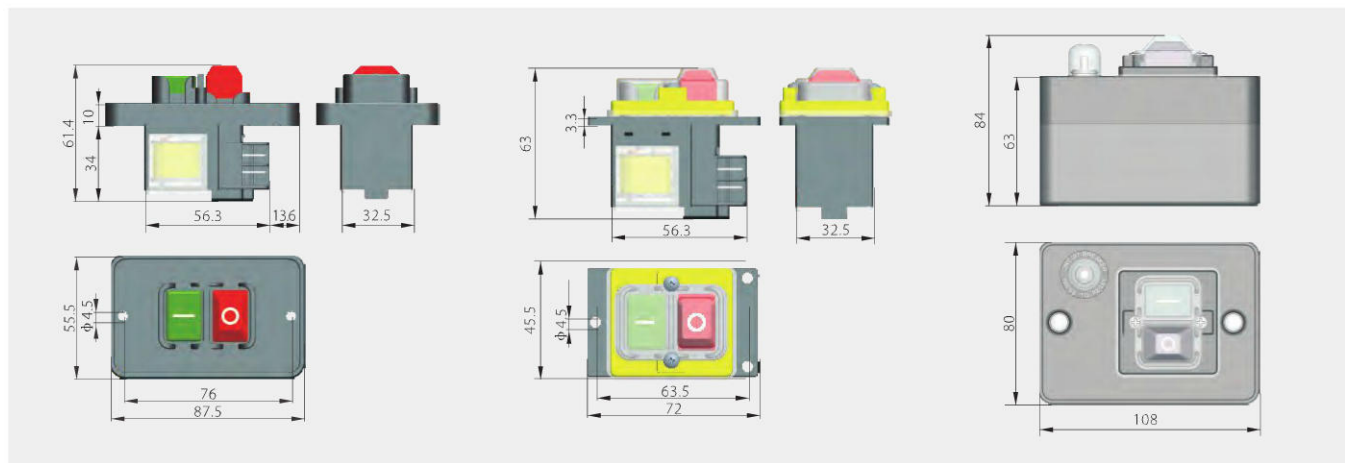

Order options

Panel	Function	Coil Voltage/Frequency	Marking on Button	Accessories
P1 A01814 	F1 	V1 120V~/50Hz V2 120V~/60Hz V3 230V~/50Hz V4 230V~/60Hz V5 240V~/50Hz V6 240V~/60Hz	M1 M2 M3 M4 M5 M6	A1 Waterproof Cover A3 Emergency stop button and Waterproof Cover PL1 PL12 PL13
P2 A05099 				
P3 A05098 				
P4 A01821 				
P5 A06008 				
P6 		F2 KJD12-10		