





## Features

- Complete solder / desolder station for production and service use.
- The soldering iron and desoldering gun can be operated independently or together.
- Temperature is micro-processor controlled and can be adjusted from 160°C to 480°C.
- The control unit has two LCDs that display the set temperature and the actual temperature in °C and °F.
- The heating element is made of PTC.
- The temperature can be easily adjusted by simple up/down buttons.

## Spare heater

Code	Voltage	Power	Use for	Note
78-415B	24V	60W	ZD-415A/B	With temperature probe
78-551B		80W	ZD-552A/B	




## Spare tips

Code	Model
79-1516	TIP N5-1
79-1526	TIP N5-2
79-1536	TIP N5-3


Spare Filter for:  
ZD-915 ZD-917  
ZD-985 ZD-987  
Φ16.8 Code:79-5518  
Φ20.8 Code:79-5519




TIPS: (N5)

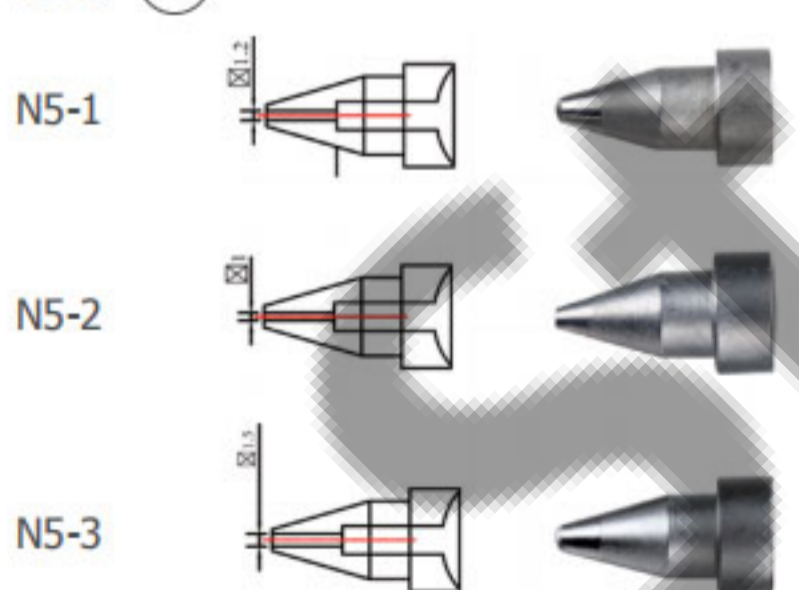

Desoldering Gun  
Clearing Tool for:  
ZD-552  
Code:79-5511  
79-5512  
79-5513

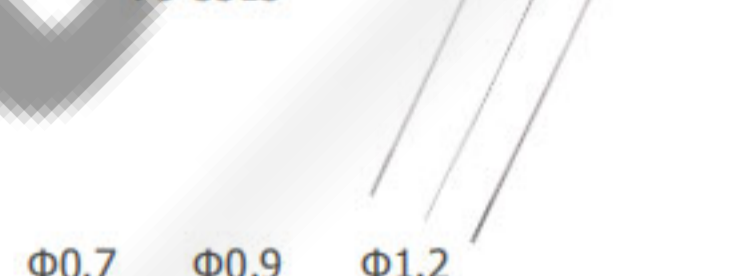

## Specifications

Code	Voltage	Note
89-1711	110-130V	Below spare parts included: 
89-1712	220-240V	
89-1713	110-130V	
89-1714	220-240V	

## Spare soldering iron

Model	Voltage	Power	Note
ZD-415A	24V	60W	4 pins, no sleep function



## Spare tips

Code	Model	Note
79-1416	TIP N4-1	High quality
79-1426	TIP N4-2	
79-1436	TIP N4-3	
79-1446	TIP N4-4	

## Spare desoldering gun

Model	Voltage	Power	Note
ZD-552A	24V	80W	6 pins, no sleep function



Model	Package	Q'ty/ctn	Carton Size	N.W	G.W
ZD-917	Gift box	1set	36x29x23cm	6kgs	7kgs

## Sponge

Code	Size
79-7305	65x50mm

