


0603 KSS NYLON CABLE GLAND (WITH STRAIN RELIEF)



Strain relief design protect cable from breakage / right angle bending

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- EG-SR series without washer, NPT-SR without washer and lock nut.

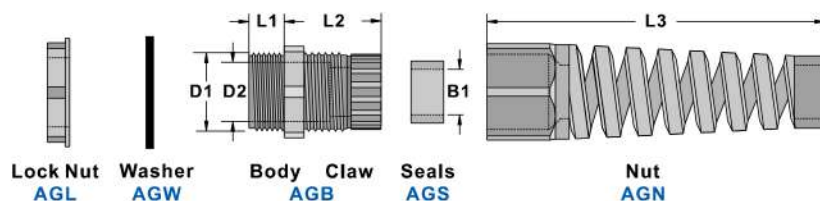

METRIC THREAD

UNIT : mm

Item No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
AG-12SR	M12x1.25	12~12.3	12.0	8.3	6.9	7.9	19.6	53.3	3~6.5	50 pcs
AG-16SR	M16x1.5	16~16.3	16.0	10.9	10.5	15.5	23.4	74.4	5~10	
AG-20SR	M20x1.5	20~20.3	20.0	15.0	14.0	15.0	28.5	96.2	10~14	
AG-25SR	M25x1.5	25~25.4	25.0	18.6	18.4	15.2	29.4	111.2	13~18	25 pcs

PG THREAD ※ Without washer

EG-7SR	PG-7	12.5~12.8	12.5	8.3	6.9	7.9	20.0	53.3	3~6.5	50 pcs
EG-9SR	PG-9	15.2~15.5	15.2	10.5	8.2	7.9	22.0	69.5	4~8	
EG-11SR	PG-11	18.6~18.9	18.6	13.2	10.5	7.9	23.7	74.9	5~10	
EG-13.5SR	PG-13.5	20.4~20.7	20.4	15.5	12.0	8.9	24.6	85.5	6~12	
EG-16SR	PG-16	22.5~22.8	22.5	17.2	14.0	9.8	26.2	96.2	10~14	25 pcs
EG-21SR	PG-21	28.3~28.7	28.3	22.4	18.4	10.8	30.0	111.2	13~18	

PF THREAD (G)

AGJ-14SR	PF1/4"	14~14.3	14.0	8.2	6.5	8.0	19.6	53.3	3~6.5	50 pcs
AGJ-17SR	PF3/8"	17~17.3	17.0	10.8	10.3	14.7	23.5	74.9	5~10	
AGJ-21SR	PF1/2"	21~21.3	21.0	14.9	14.0	12.9	28.3	96.2	10~14	
AGJ-27SR	PF3/4"	27~27.3	27.0	18.5	18.0	14.7	29.1	111.2	13~18	25 pcs

NPT THREAD ※ Without washer and lock nut

NEW NPT-14SR	1/4"-18NPT	13.2~13.5	13.2	8.2	6.9	7.8	19.7	53.3	3~6.5	50pcs
NEW NPT-38SR	3/8"-18NPT	16.7~17.0	16.7	10.8	10.5	14.6	23.8	74.9	5~10	
NEW NPT-12SR	1/2"-14NPT	21.2~21.5	21.2	14.9	14.0	12.9	28.4	96.2	10~14	
NEW NPT-34SR	3/4"-14NPT	26.3~26.6	26.3	18.5	18.4	14.5	29.2	111.2	13~18	25pcs